

Suction Device KAMVAC

Z 73-1 e

01.04.2008

Applications


Compact, mobile vacuum suction device with separator and dirty-water return pump in weather-proof, robust design and height-adjustable frame.

For suction of fluids and solids.

Ideally suited for use with KAMAT SHC 3000, Wall Cleaner and Surface Cleaner 3000 bar, using hoses up to a maximum length of 50 m.

Technical data and equipment

- Part No. 7014096
- Height-adjustable supports with fixed and steering rollers, with space below for a 1000 l collection chamber
- Draining via shuttle valve
- Separator with screen filter 100 µm for separation of fluids and solids
- Level indicator for fluids and solids
- Float valve for return pump ON / OFF
- Suction unit 11 kW with side-channel vacuum pump, vacuum limiter and safety valve
- Dirty-water return pump approx. 2000 l/h with Storz D-coupling in outlet, non-return valve and ball valve
- Suction fitting DN 100 MV / 60 K
- Electric controls with socket 230 V/50 Hz/16 Ah
- Supply voltage 400 V/50 Hz
- Control voltage 24 V/50 Hz
- Potential-free contacts for switching on and off via remote control
- Cable reel with 50 m cable and CEE plug

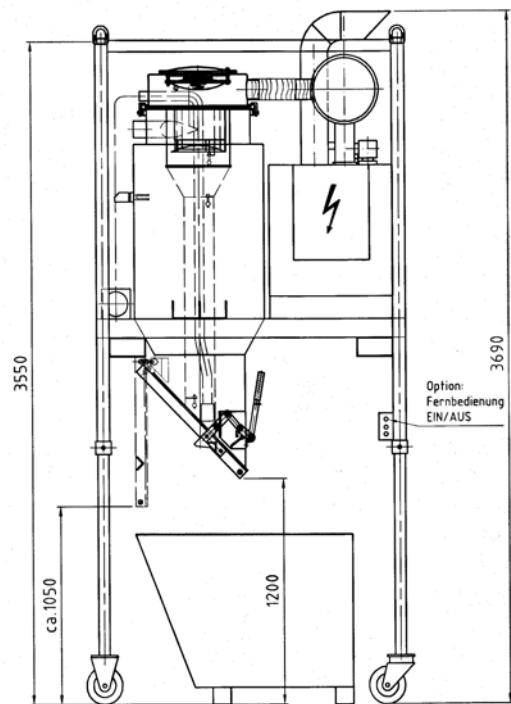

Additional equipment

- Suction hose DN 60 x 10 m with connector 7014097
- Coupling piece DN 60 for hose for hose connection 7014098
- Suction hose DN 50 x 10 m to the consumer; on one side with coupling piece DN 60, on the other side with Storz C-coupling 7014099
- Dirty-water hose DN 25 x 10 m with Storz D-coupling 7014100