


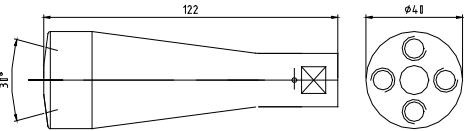
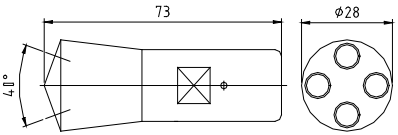
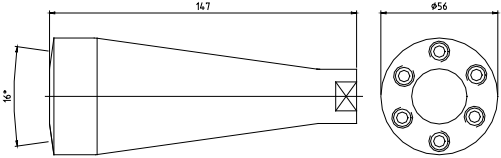
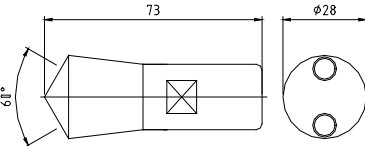
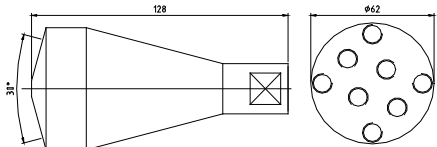
**NOZZLE HEADS FOR ROTATING TOOLS** Z 35-1e

28.02.2023

Page 1/1

**Technical Data:**

- Max. operating pressure: 3000 bar
- Connector: M14x1.5 left, female, with 59° cone
- Nozzle inserts: see page Z 55-1e und Z 55-3e

Typ		Düsen- bestückung	Anwendung	Teile-Nr.
RLH 1		max. 6 x Type 0982 Standard configuration : 6x0.35 mm	Cleaning and removal in areas of difficult access	7006182 without nozzle inserts
RLH 2		max. 4 x Type 0964 Standard configuration: 4x0.4 mm	Surface treatment Concrete removal Roughening of concrete surfaces Removal of paint and coatings	7006391 without nozzle inserts
RLH 3		max. 4 x Type 0982 Standard configuration: 4x0.4 mm	Removal of difficult coatings Cleaning in areas where access is limited	7006184 without nozzle inserts
RLH 4		max. 6 x Type 0964 Standard configuration: 6x0.35 mm	Surface treatment Concrete removal Roughening of concrete surfaces Removal of paint and coatings	7006428 without nozzle inserts
RLH 5		max. 2 x Type 0982 Standard configuration: 2x0.6 mm	Removal of difficult coatings Cleaning in areas where access is limited	7006183 without nozzle inserts
RLH 6		max. 8 x Type 0964 Standard configuration: 8x0.3 mm	Surface treatment Concrete removal Roughening of concrete surfaces Removal of paint and coatings	7006943 without nozzle inserts
Steel protection cover for nozzle head type RLH 2				7007949
Steel protection cover for nozzle head type RLH 4				7008082

For special applications further nozzle types can be designed to specification